


Ai-auxRCA is an automatic priority switcher that switches the RCA audio input of an aftermarket amplifier or car stereo RCA auxiliary input from a personal music player “MP3” to 2-Way Radio

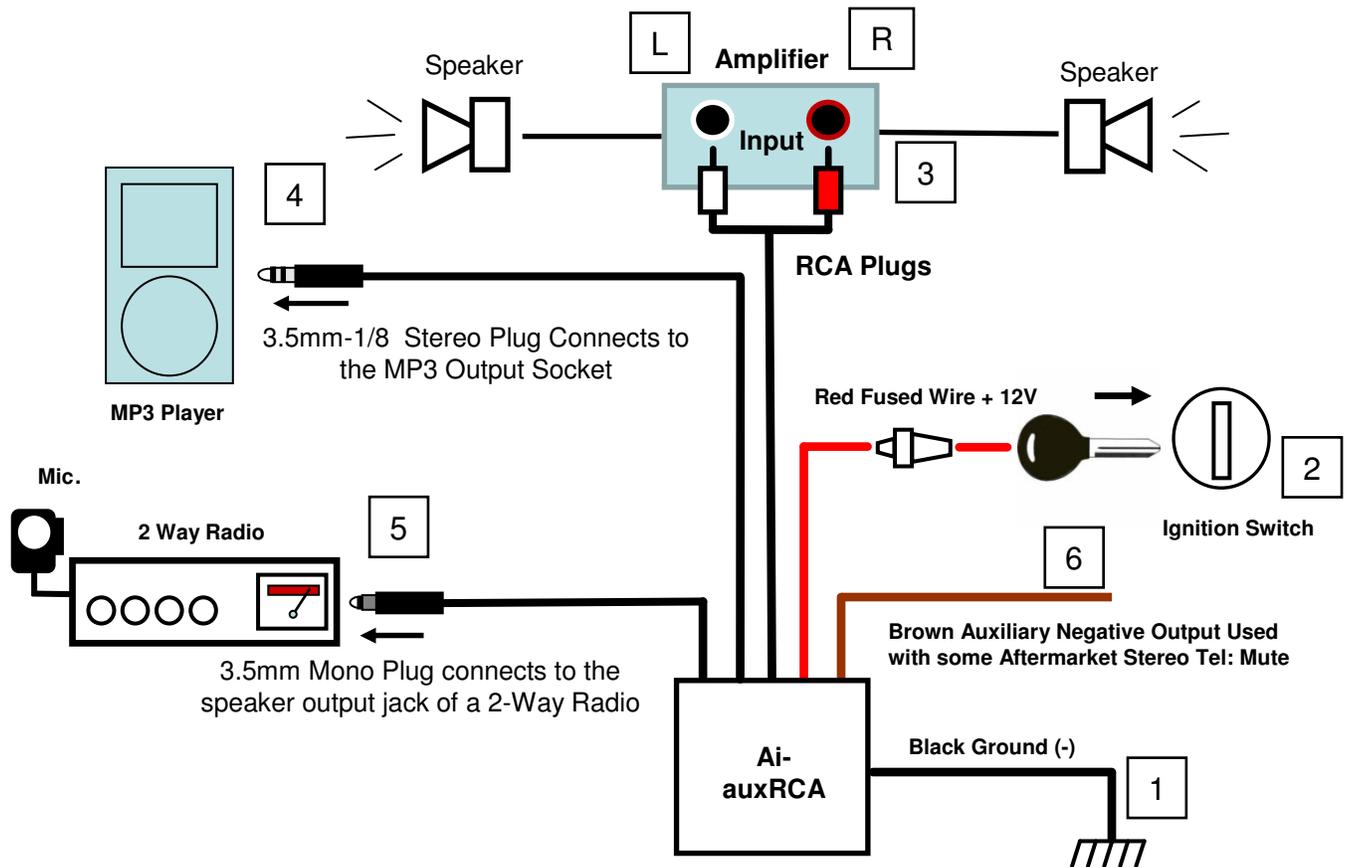

Ai-auxRCA is a automatic 2 way-radio voice activated mute and switch device that allows seamless interaction between an MP3, 2Way Radio and the Aftermarket Amplifier. Mounting is out of sight behind the dash. When voice is present (volume set at a pleasant listening level) on a 2 way-radio the MP3 automatically mutes and audio is switched to 2 way-radio voice and heard through the stereo speakers system. It remains switched for three seconds after the last voice message is received, then automatically returns back to normal MP3 play.

Installs In Minutes No Modification Needed:

- (1) Black Lead** wire connects to the chassis ground. Attach to a clean metal surface of the vehicle with a screw or bolt.
- (2) Red Fused 2amp Lead** wire connects to the accessory terminal of the ignition switch. This is usually found at the fuse panel. Check with your vehicle owner's manual for the location.
- (3) RCA Male Plugs** White plug is left channel that plugs into the left RCA audio input of the aftermarket amplifier. Red plug is right channel plugs into the right RCA audio input of the aftermarket amplifier.
- (4) 3.5mm stereo plug** having (3) silver bands connects to the MP3 or ipod stereo output socket.
- (5) 3.5mm mono with black plug** having (2) silver bands connects into the speaker output socket of a 2-way radio.

Water Proof Potting compound is used on this product to encapsulate the circuitry and cable assembly that protects against vibration, dust and accidental immersion in sea water. JIS8 rated Made in the USA.