


CBM-TOY96 A Plug & Play, Automatic Stereo Mute & Speaker Switch for Most 1996-2012 Toyotas, Including FJ Cruiser, Tacoma, Tundra & 4Runner with a *Non-Amplified* OE stereo and a 2 or 4-Speaker System

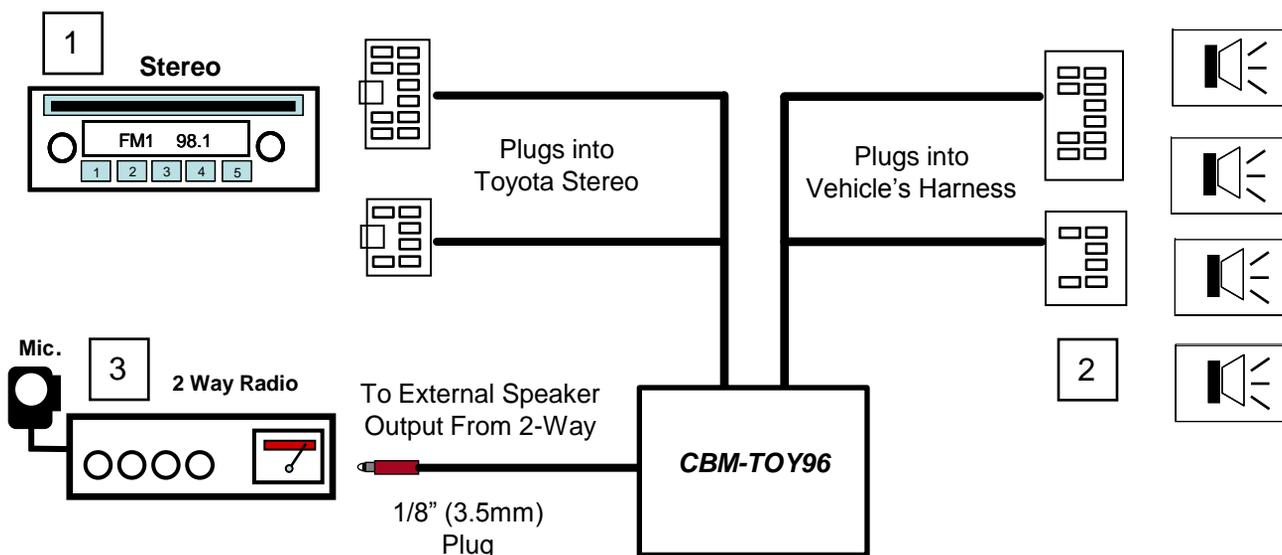

Hear 2-Way Radio Voice Through Factory Jeep Speakers

CBM-TOY96 (CB Monitor) is a automatic stereo muting and speaker switching device that allows seamless interaction between the factory **Toyota® Stereo** and a scanner, CB, Ham or other radio, receiving device equipped with a mono 1/8" external speaker output jack.

The CB Monitor is between the **Toyota® Stereo** and the **Factory Speakers**, and mounted behind the dash near the stereo. This **CB Monitor** will not work on **amplified OE stereo systems**.

When voice is present (volume set at a pleasant listening level) on a 2 way-radio the stereo automatically mutes and switches the two front speaker to the 2 way radio voice. It remains switched and muted for three seconds after the last voice message is received, then returns back to normal stereo play.

Installs In Minutes with No Adjustments to make or Modifications Needed

Start by removing the factory stereo and unplugging the 2 harness plugs that connect the Toyota® stereo to the vehicle.

- (1) Plug the two female plugs from the **CB Monitor** into the **Toyota® Stereo**.
- (2) Plug the two male plugs from **CB Monitor** into the two factory female plugs on the stereo's harness.
- (3) Plug the 1/8" (3.5mm) male connector from the **CB Monitor** into the Two-Way Radio, Scanner or GPS 1/8" External Speaker Output Socket.

Adjustments to the Two-Way Radio's volume and squelch will give you control over the stereo's muting by the **CB Monitor**. Less squelch will result in more stereo interruptions. However, low to no squelch and very low volume can result in no muting at all. A balance of volume at normal listening level and a good squelch setting will deliver great results.

For additional information go to email info@audiointerrupt.com , phone 858-349-4918