


Ai-auxRCA is an automatic priority switcher that switches the RCA audio input of an aftermarket amplifier from car stereo to Two-Way Radio voice

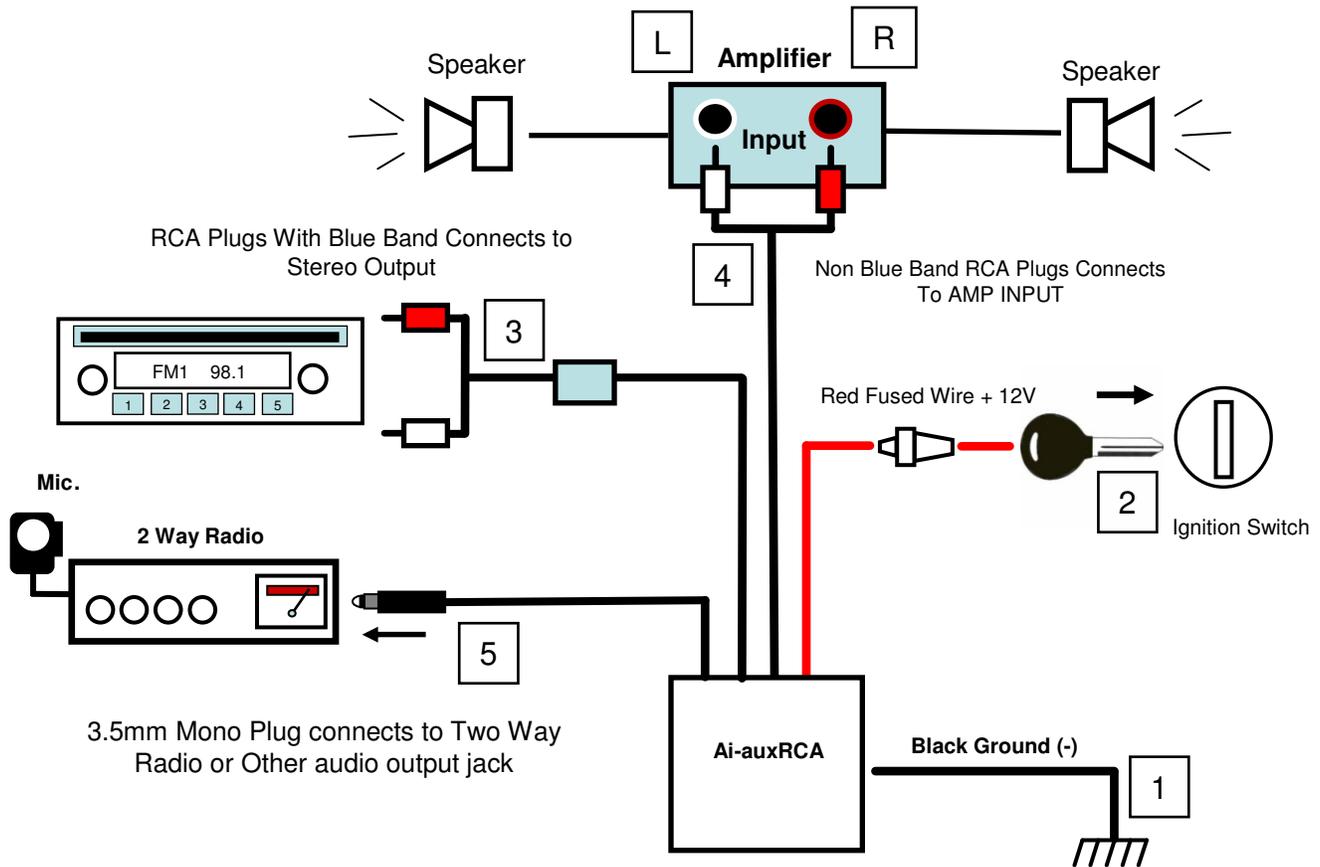

Ai-auxRCA is a automatic voice activated mute and switch device that allows seamless interaction between a car stereo and Two Way-Radio. Mounting is out of sight behind the dash. When voice is present (volume set at a pleasant listening level) on a Two Way Radio the Ai-aux RCA automatically switches the audio to Two Way-Radio voice. It remains switched for three seconds after the last voice message is received, then automatically returns back to normal stereo play.

Installs In Minutes No Modification Needed:

- (1) **Black Lead** wire connects to the chassis ground. Attach to a clean metal surface of the vehicle with a screw or bolt.
- (2) **Red Fused 2amp Lead** wire connects to the 12 volt accessory terminal of the ignition switch. This is usually found at the fuse panel. Check with your vehicle owner's manual for the location.
- (3) **RCA Male Plugs** with **Blue** band connects to audio output of the aftermarket Car Stereo.
- (4) **RCA Male Plugs** non-blue band connects to audio input of the aftermarket Amplifier.
- (5) **3.5mm mono plug** having (2) silver bands connects into the audio output socket of a GPS, 2way Radio or other. Water Proof Potting compound is used on this product to encapsulate the circuitry and cable assembly that protects against vibration, dust and accidental immersion in sea water. JIS8 rated Made in the USA.